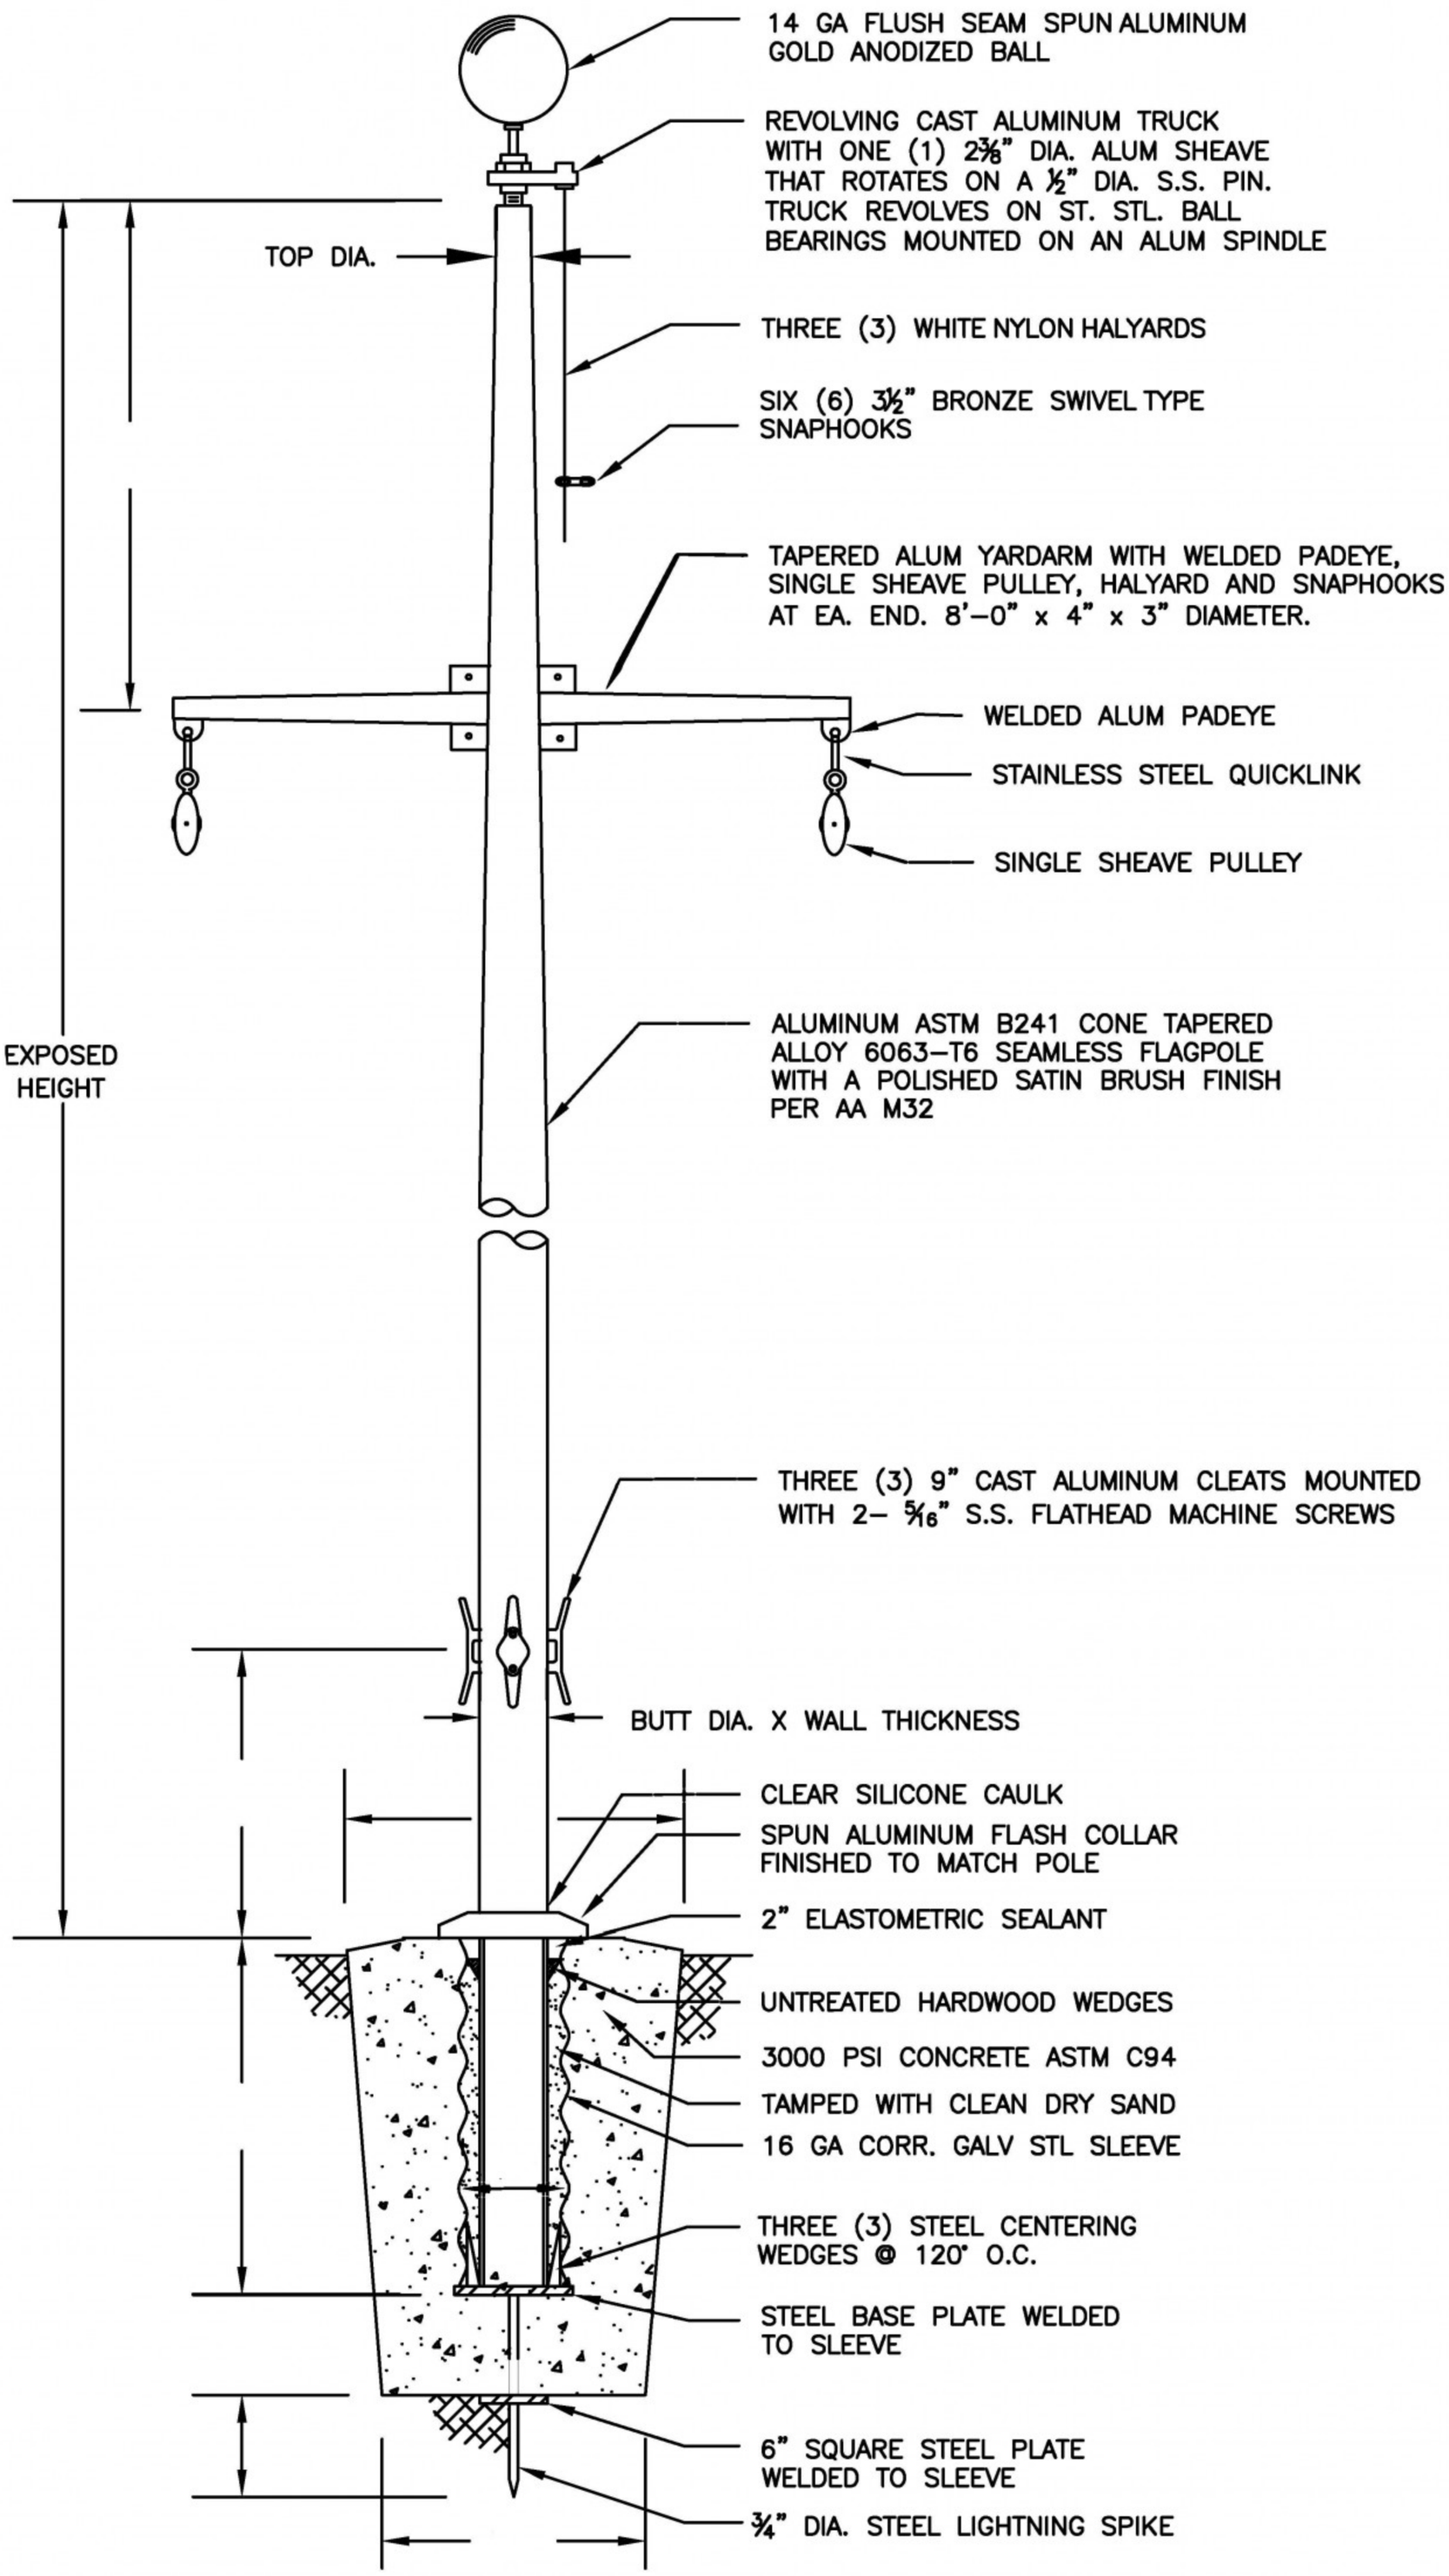
14 GA FLUSH SEAM SPUN ALUMINUM GOLD ANODIZED BALL
REVOLVING CAST ALUMINUM TRUCK WITH ONE (1) 2⅜" DIA. ALUM SHEAVE THAT ROTATES ON A ½" DIA. S.S. PIN. TRUCK REVOLVES ON ST. STL. BALL BEARINGS MOUNTED ON AN ALUM SPINDLE
TOP DIA.
THREE (3) WHITE NYLON HALYARDS
SIX (6) 3½" BRONZE SWIVEL TYPE SNAPHOOKS
TAPERED ALUM YARDARM WITH WELDED PADEYE, SINGLE SHEAVE PULLEY, HALYARD AND SNAPHOOKS AT EA. END. 8'–0" x 4" x 3" DIAMETER.
WELDED ALUM PADEYE
STAINLESS STEEL QUICKLINK
SINGLE SHEAVE PULLEY
EXPOSED HEIGHT
ALUMINUM ASTM B241 CONE TAPERED ALLOY 6063–T6 SEAMLESS FLAGPOLE WITH A POLISHED SATIN BRUSH FINISH PER AA M32
THREE (3) 9" CAST ALUMINUM CLEATS MOUNTED WITH 2– 5/16" S.S. FLATHEAD MACHINE SCREWS
BUTT DIA. X WALL THICKNESS
CLEAR SILICONE CAULK
SPUN ALUMINUM FLASH COLLAR FINISHED TO MATCH POLE
2" ELASTOMETRIC SEALANT
UNTREATED HARDWOOD WEDGES
3000 PSI CONCRETE ASTM C94
TAMPED WITH CLEAN DRY SAND
16 GA CORR. GALV STL SLEEVE
THREE (3) STEEL CENTERING WEDGES @ 120° O.C.
STEEL BASE PLATE WELDED TO SLEEVE
6" SQUARE STEEL PLATE WELDED TO SLEEVE
¾" DIA. STEEL LIGHTNING SPIKE