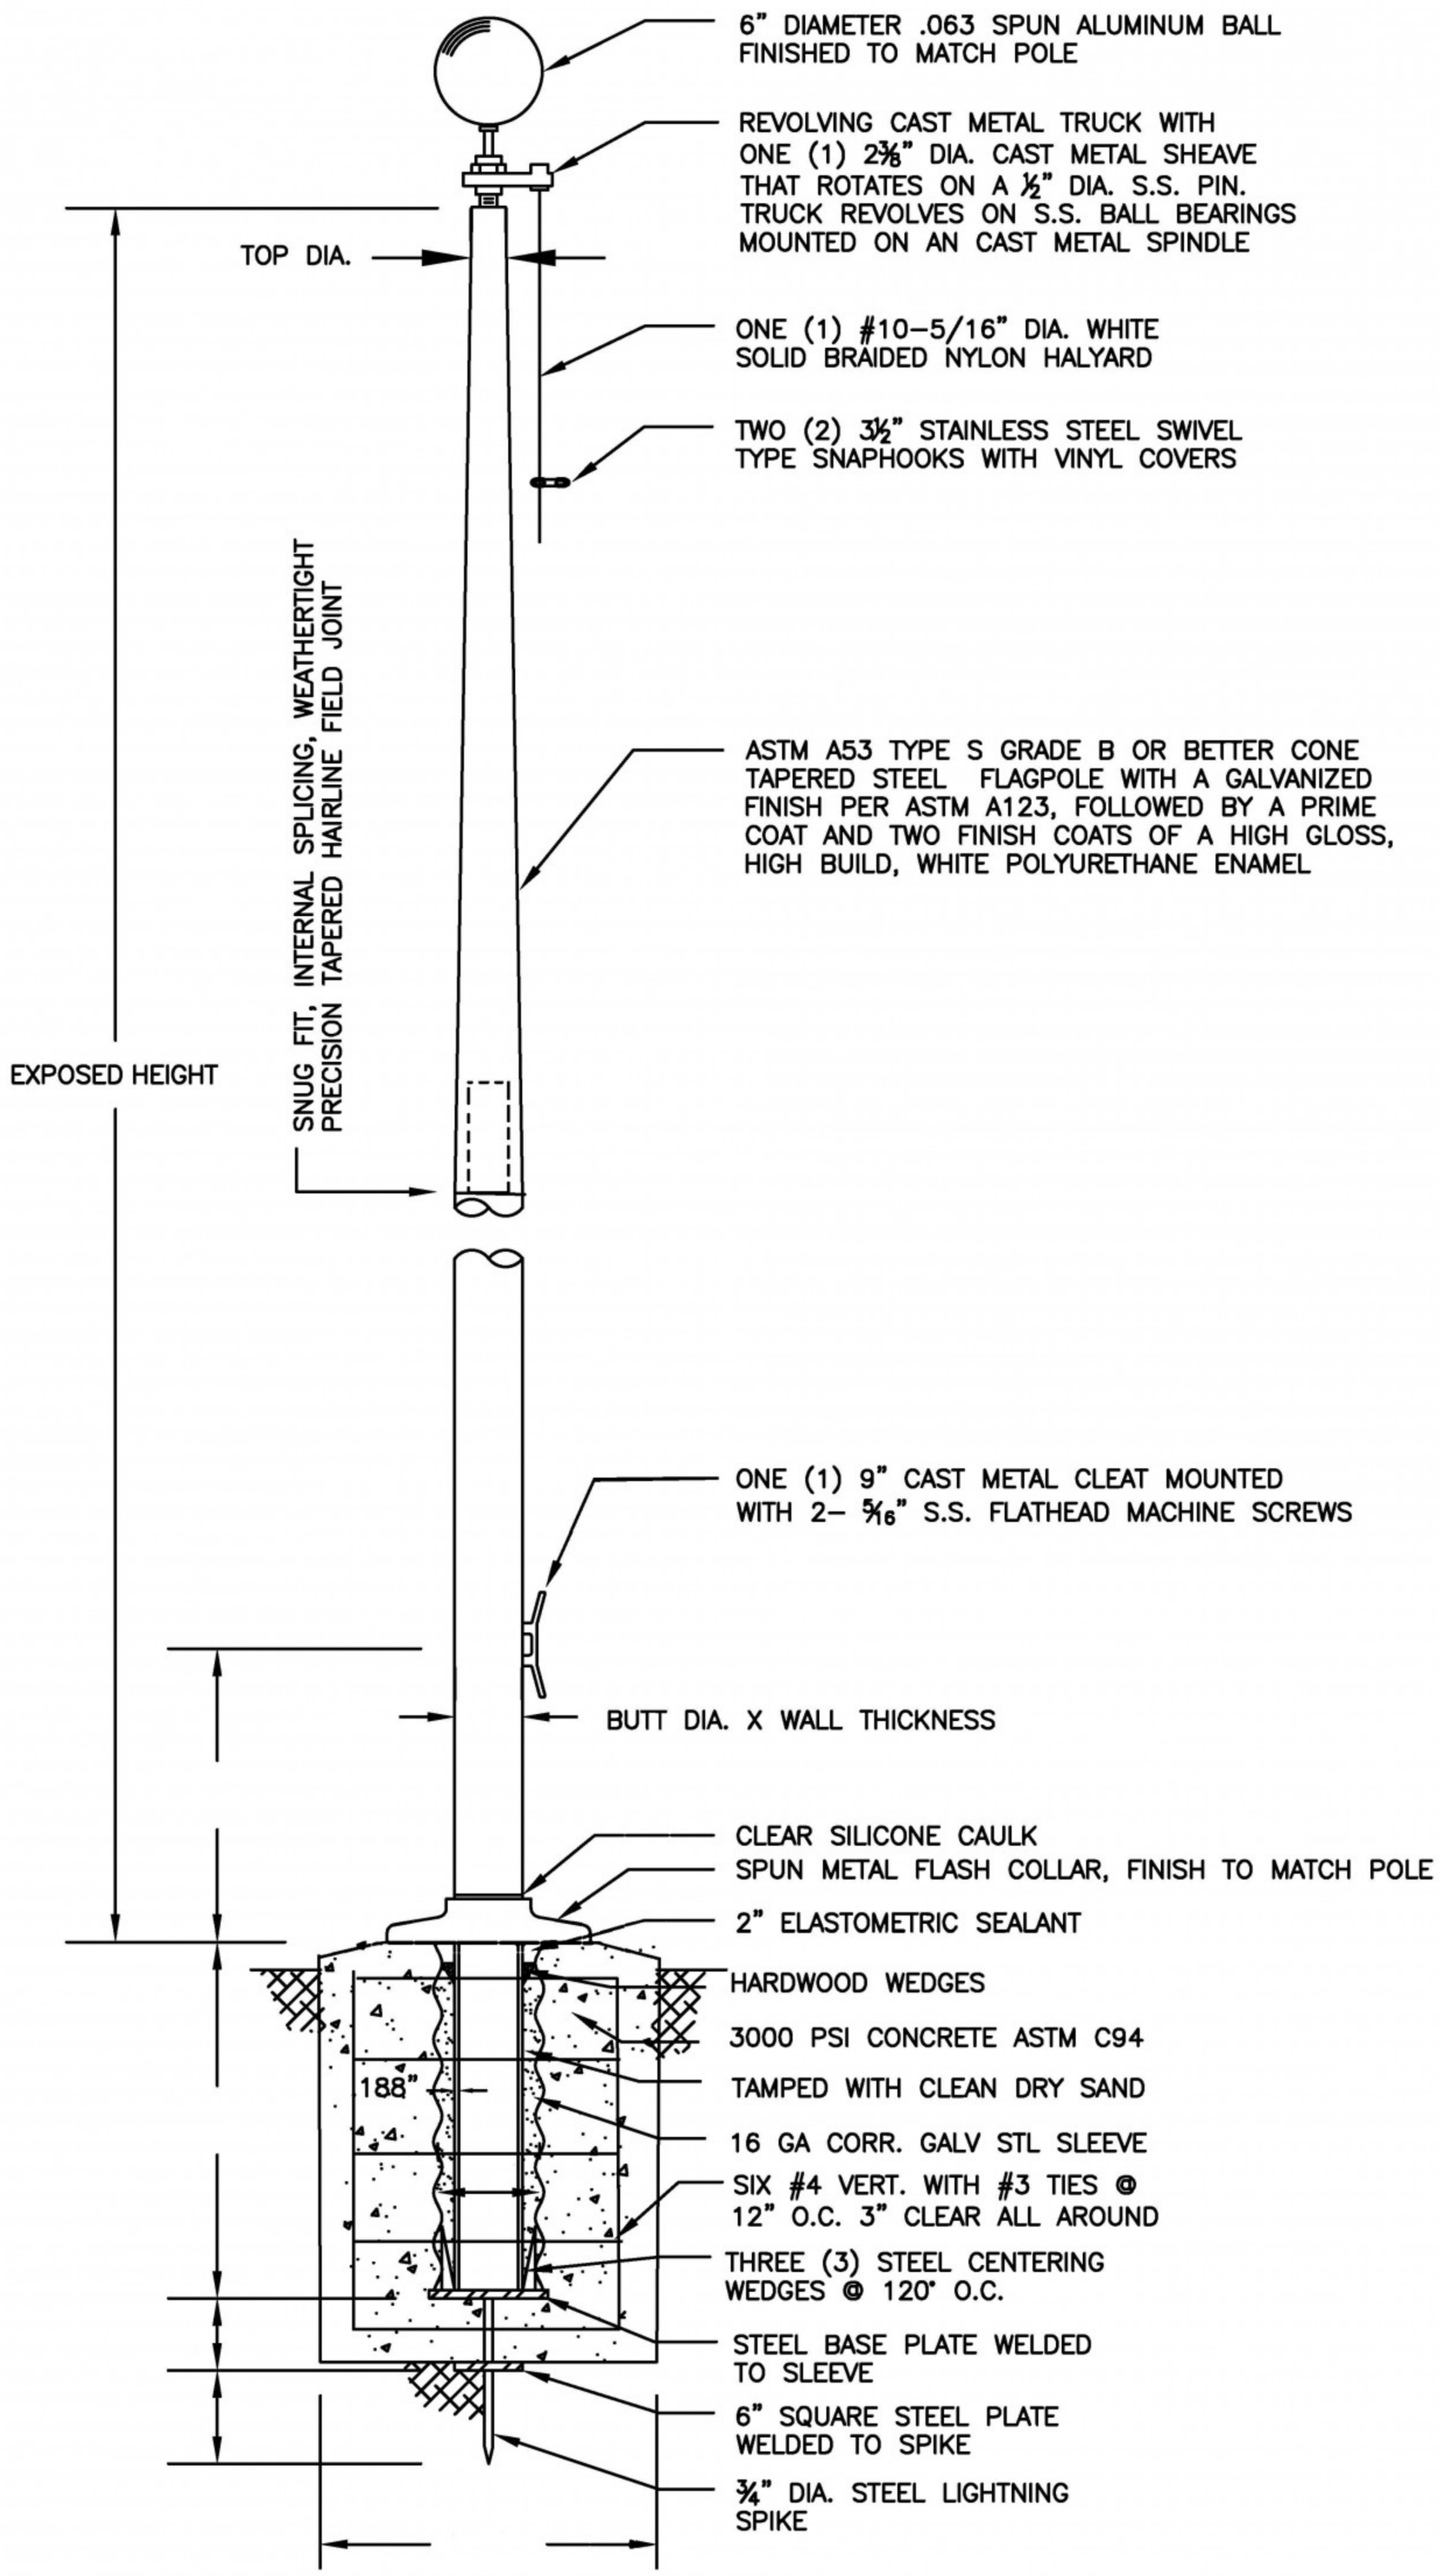
6" DIAMETER .063 SPUN ALUMINUM BALL FINISHED TO MATCH POLE
REVOLVING CAST METAL TRUCK WITH ONE (1) 2⅜" DIA. CAST METAL SHEAVE THAT ROTATES ON A ½" DIA. S.S. PIN. TRUCK REVOLVES ON S.S. BALL BEARINGS MOUNTED ON AN CAST METAL SPINDLE
TOP DIA.
ONE (1) #10–5/16" DIA. WHITE SOLID BRAIDED NYLON HALYARD
TWO (2) 3½" STAINLESS STEEL SWIVEL TYPE SNAPHOOKS WITH VINYL COVERS
SNUG FIT, INTERNAL SPLICING, WEATHERTIGHT PRECISION TAPERED HAIRLINE FIELD JOINT
ASTM A53 TYPE S GRADE B OR BETTER CONE TAPERED STEEL FLAGPOLE WITH A GALVANIZED FINISH PER ASTM A123, FOLLOWED BY A PRIME COAT AND TWO FINISH COATS OF A HIGH GLOSS, HIGH BUILD, WHITE POLYURETHANE ENAMEL
EXPOSED HEIGHT
ONE (1) 9" CAST METAL CLEAT MOUNTED WITH 2– 5/16" S.S. FLATHEAD MACHINE SCREWS
BUTT DIA. X WALL THICKNESS
CLEAR SILICONE CAULK
SPUN METAL FLASH COLLAR, FINISH TO MATCH POLE
2" ELASTOMETRIC SEALANT
HARDWOOD WEDGES
3000 PSI CONCRETE ASTM C94
188"
TAMPED WITH CLEAN DRY SAND
16 GA CORR. GALV STL SLEEVE
SIX #4 VERT. WITH #3 TIES @ 12" O.C. 3" CLEAR ALL AROUND
THREE (3) STEEL CENTERING WEDGES @ 120° O.C.
STEEL BASE PLATE WELDED TO SLEEVE
6" SQUARE STEEL PLATE WELDED TO SPIKE
¾" DIA. STEEL LIGHTNING SPIKE